

# SaphyGATE G



## Smart radiation portal monitor for vehicle & load control

- Accurate detection & adaptive alarm thresholds
- Very low false alarm rate
- Fully automatic and remote support



# SAPHYGATE G


## MONITORING SYSTEM FOR TRUCK, TRAIN AND CARGO LOADS

Featuring advanced technologies and modern design, SaphyGATE G is the new generation of Radiation Portal Monitors, the perfect solution for truck, train and cargo control. Our extensive experience and highest quality standards are the guarantee of proven reliability in the field, making SaphyGATE G ideal for continuous operation in industrial environments and harsh conditions.

SaphyGATE G is based on multiple high volume plastic PVT scintillation detectors, associated to a new enhanced real-time Gamma energy distribution algorithm to ensure background compensation, adaptive alarm thresholds and alarm classification for the discrimination of natural and artificial radiation.

This fully automatic and self-sufficient solution includes an intuitive supervision software and friendly graphic touchscreen interface.

### Smart background compensation

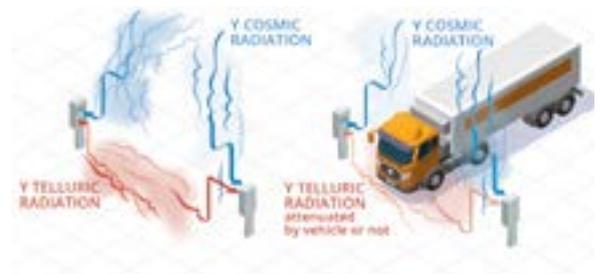

SaphyGATE G is based on an innovative algorithm, designed to compensate the background attenuation caused by the vehicle driving through. This feature allows to perform a better radiation detection with a lower false alarm rate compared to other classical systems, even in case of small activity sources.

### Applications



Waste & recycling control



Nuclear access control



Hospital waste control



Border control

### Services



Bertin Instruments' team of experts offers tailored solutions for technical support, training, maintenance and on-site interventions in order to answer every customer needs.

### Technical features

<b>Type of detector</b>	Plastic scintillator detector PVT (Polyvinyltoluene) 25 liters / 6,6 gal
<b>Energy range</b>	From 30 keV to 7 MeV
<b>Working temperature</b>	From -20°C to +50°C (-4°F to +122°F)
<b>Enclosure</b>	Hermetic aluminium box, EMC shielded
<b>Central unit</b>	Industrial PC with MS Windows and TFT XGA 12" colored touch-screen
<b>Protection grade</b>	IP 65
<b>Standards</b>	Compliant with international standards including IEC 62022
<b>Dimensions / Weight</b>	1500 x 750 x 320 mm (59" x 29" x 13") About 400kg (882 lb) with lead shields and stand